


10DCS202

Digitek F Type 2 Way Splitter

All Ports Power Pass

5MHz to 2400MHz

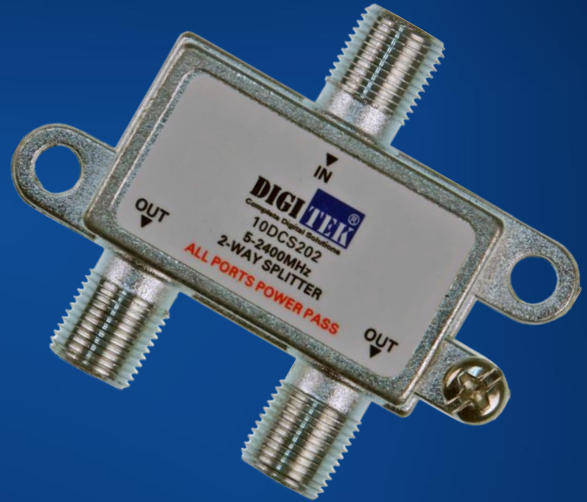

Features:

- Zinc die-cast housing, tin-plated
- Light weight and compact size
- Easy installation with two edge hole sites
- Mounting Screws Supplied
- Housing Earth Point
- Earth Screw Supplied
- Screening factor: 5-2400MHz ≥ 100 dB
- Low insertion loss, high isolation
- Micro-strip circuit design and perfect performance index
- Designed for SATV & CATV
- Power pass all legs 24v 0.8amp (max)
- All ports F Type female connector, 75 Ω

Specifications

Frequency Range (MHz)	Insertion Loss (dB)	Mutual Isolation (dB)	Return Loss (dB)
5-40	≤ 4.5	≥ 18	≥ 10
40-1000	≤ 4.5	≥ 22	≥ 11
1000-1750	≤ 5.0	≥ 20	≥ 11
1750-2400	≤ 6.0	≥ 20	≥ 10