


# 10DCS203

## Digitek F Type 3 Way Splitter

All Ports Power Pass

5MHz to 2400MHz

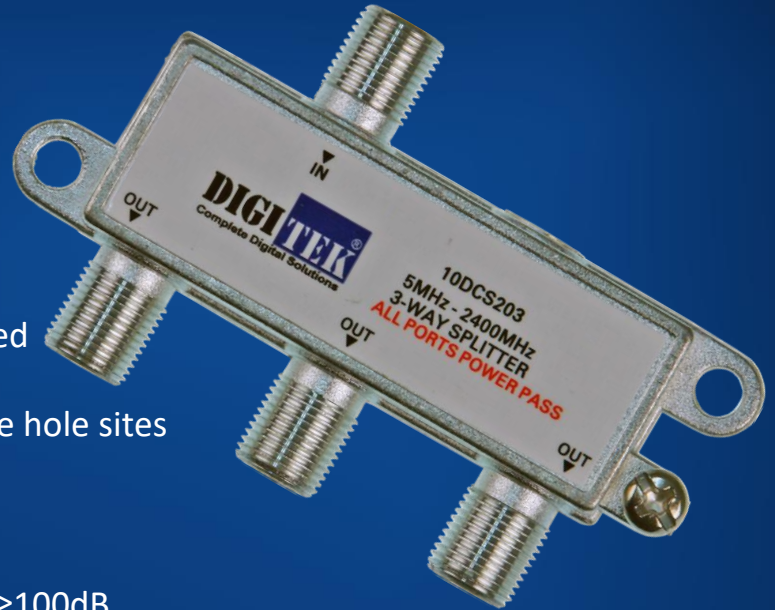

### Features:

- Zinc die-cast housing, tin-plated
- Light weight and compact size
- Easy installation with two edge hole sites
- Mounting Screws Supplied
- Housing Earth Point
- Earth Screw Supplied
- Screening factor: 5-2400MHz  $\geq 100$ dB
- Low insertion loss, high isolation
- Micro-strip circuit design and perfect performance index
- Designed for SATV & CATV
- Power pass all legs 24v 0.8amp (max)
- All ports F Type female connector, 75 $\Omega$

### Specifications

Frequency Range (MHz)	Insertion Loss (dB)	Mutual Isolation (dB)	Return Loss (dB)
5-40	$\leq 7.5$	$\geq 20$	$\geq 10$
40-1000	$\leq 8.0$	$\geq 20$	$\geq 11$
1000-1750	$\leq 9.5$	$\geq 20$	$\geq 11$
1750-2400	$\leq 10.8$	$\geq 20$	$\geq 10$