192KHz Digital to Analog Audio Converter

Quick Installation Guide

Ver. 1.0

INTRODUCTION:

This 192KHz Digital to Analog Audio Converter can transfer digital Audio(optical/coaxial) to two channels analog audio and amplify the output(but using directly on headphone is not recommended), just suitable for using together with the devices such as digital television, CD/DVD/Blue-ray player etc., which with coaxial or optical digital signal output.

FEATURES:

- Maximum support 192KHz/24bit Audio signal
- Optical/coaxial optional input function
- 2 sound channels stereo RCA audio output
- 3.5mm sound output dock
- DC/Mini USB power supply port
- Support format is PCM, do not support DOLBY and DTS format


PACKAGE CONTENTS

- 192KHz Digital to Analog Audio Converter
- 5V /DC power supply adapter
- USB power Cable
- User Manual

1

All brand names and trademarks are properties of their respective owners

INSTRUCTIONS FOR USE:

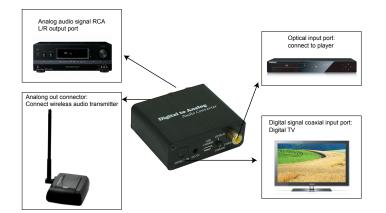


SPECIFICATIONS:

Power supply	5 V/I
Output amplitude	1.5V
Frequency Response	20H
Signal to Noise Ratio	≥950
Crosstalk	≥850
Total harmonic distortion	<0.0

5 V/DC 1.5V(0 dB Fs) 20Hz~20KHz ≥95dB ≥85dB <0.008%

PANEL DESCRIPTIONS:

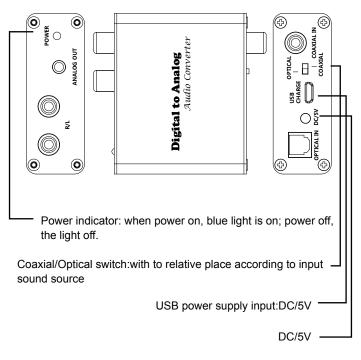

4

2