

Part Number: 06DC6PL0.5B
 06DC6PL1.0B
 06DC6PL2.0B
 06DC6PL3.0B
 06DC6PL5.0B
 06DC6PL10B
 06DC6PL20B
 06DC6PL30B

CAT6 UTP Patch Cord.

Features:

Cat6 standard cable, Gigabit Ethernet, backward compatible with Cat5e/5 and Cat3 standards.

4 Stranded Twisted Pairs

24AWG Copper Wire.

RJ45 molded connectors with injected PVC boots for cable strain relief.

Materials:

Cable: CAT6 UTP (7/0.18±0.008CU+PE) 4 Pair + Filler + PVC Jacket OD: 6.0±0.2mm

Plugs: RJ45 8P8C Male Type

Insulation: Clear Polyester, UL94V-2

Contact: Brass Gold Plated 50µ

Strain Relief: Molded PVC



Electrical properties:

Insulation Resistance: Min ≥ 200MΩ/M @ 20°C.

Conductor Resistance: Max ≤ 9.51 Ω/100M @ 20°C.

Temperature Rating: 75°C.

RCM Compliant.

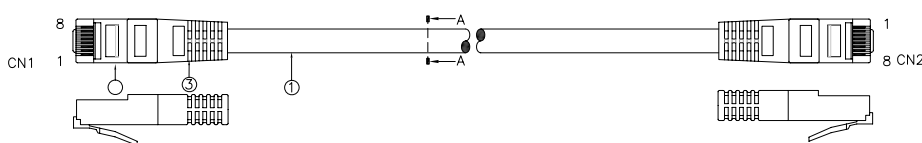

www.bitek.com.au

Available From

National Phone: 1300 601 915
 Email: orders@bitek.com.au

Bitek Pty Ltd
 11 Sheppard Street
 Hume
 ACT 2620
 Ph: 02 6260 1874

Bitek (Syd) Pty Ltd
 Unit 7, 463 Victoria Street
 Wetherill Park
 NSW 2164
 Ph: 02 9659 2272

Bitek (Vic) Pty Ltd
 22 Constance Court
 Epping
 VIC 3076
 Ph: 03 9456 9222

Bitek (SA) Pty Ltd
 1 Temple Court
 Ottoway
 SA 5013
 Ph: 08 8395 4111