

23MDPP246

CAT6 24 Port Patch Panel with Cable Tidy.

Specification:

Frame: SPCC.

Plastic Housing: ABS.

RJ45 contact material & finish: a) Nickel Plated Phosphor Bronze.
b) Contact area: 50µ Gold Plated.

IDC Housing: PC.

IDC Terminal material & finish: a) Tin plated Phosphor Bronze.
b) Dual Tool compatible.
c) Suitable for 22-26AWG stranded and solid wire.

Colour Coded Labels for T568A & T568B.

Insertion Force: 900grms for 8 contacts.

Retention Strength: 7.7kgs between Jack & Plug.


Operation Temperature: -30° to 68°.

Durability: Jack: 750 cycles Plug – Jack mating & un-mating test.
Insertion cycles/minute max, contact resistance test per 100 cycles.

IDC: Max. 200 punching times.

Cat6 performance in compliance with ANSI/TIA/EIA 568 C.2 standard.

RCM Compliant.

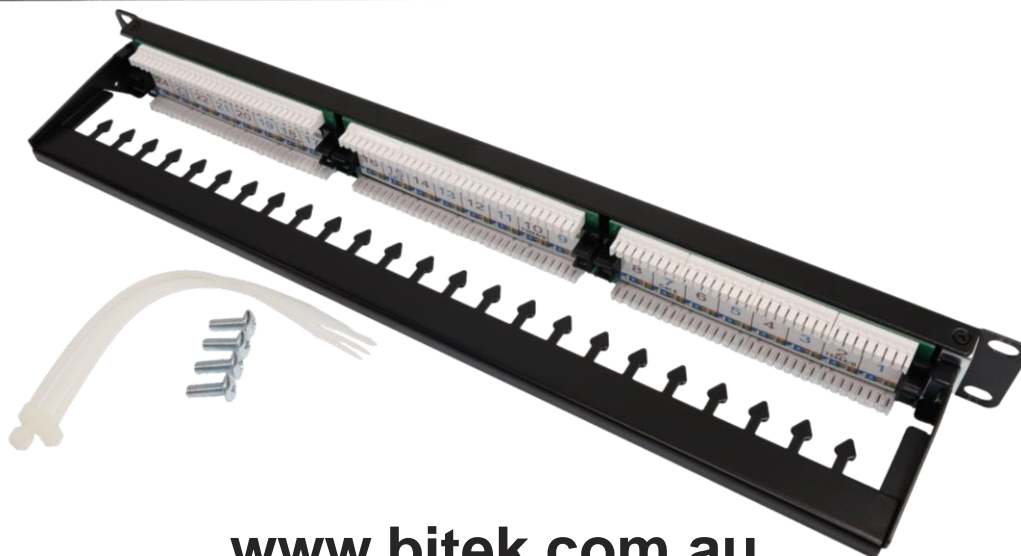

www.bitek.com.au

Available From

National Phone: 1300 601 915
Email: orders@bitek.com.au

Bitek Pty Ltd
11 Sheppard Street
Hume
ACT 2620
Ph: 02 6260 1874

Bitek (Syd) Pty Ltd
Unit 7, 463 Victoria Street
Wetherill Park
NSW 2164
Ph: 02 9659 2272

Bitek (Vic) Pty Ltd
22 Constance Court
Epping
VIC 3076
Ph: 03 9456 9222

Bitek (SA) Pty Ltd
1 Temple Court
Ottoway
SA 5013
Ph: 08 8395 4111