


Band Pass Filter (Block A)
09ABPFA

FEATURES:

- Protects against interference from other transmitters and out-of-band noise
- Band-pass design allows only 174-230 MHz frequencies to pass
- High rejection of unwanted frequencies below 146 MHz and above 251 MHz
- Low insertion loss (2-3 dB) ensures strong, clear signal transmission
- Water-resistant (IPx4) for indoor or protected outdoor use
- Compact 75 Ω inline design—easy to install between antenna and receiver
- Ideal for DVB-T and digital television systems

SPECIFICATIONS

FILTER TYPE	Band Pass			
CHANNEL PASS THROUGH	6 - 12			
COLOUR	Silver			
CONSTRUCTION	Metal housing with F-Type connectors			
CONNECTOR TYPE	F-Type Female to F-Type Male			
CHANNEL PLANNING BLOCK	A			
COLOUR	Silver			
PARAMETER	MIN.	TYPICAL	MAX	UNIT
FREQUENCY RANGE	5 - 1000			MHz
IMPEDANCE	75			Ω
PASS BAND	174 - 230			MHz
INSERTION LOSS (174-230 MHz)	-	2.0	3.0	dB
RETURN LOSS (174-230 MHz)	12	16	-	dB
1ST STOP BAND	5 - 146			MHz
REJECTION (5-146 MHz)	40	45	-	dB
2ND STOP BAND	251 - 1000			MHz
REJECTION (251-1000 MHz)	40	45	-	dB
WATERPROOF RATING	IPx4			
PACKAGING	Poly Bag with Label			
WARRANTY	1 Year			

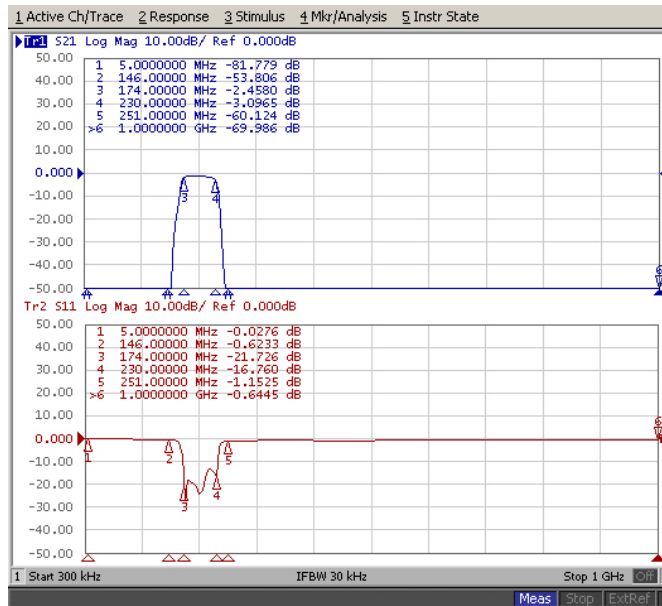

(Frequency Response)

FOR MORE INFORMATION:

☎ 1300 601 915 ✉ orders@bitek.com.au 🌐 www.bitek.com.au

DISTRIBUTED BY: **BITEK** BITEK PLY LTD