




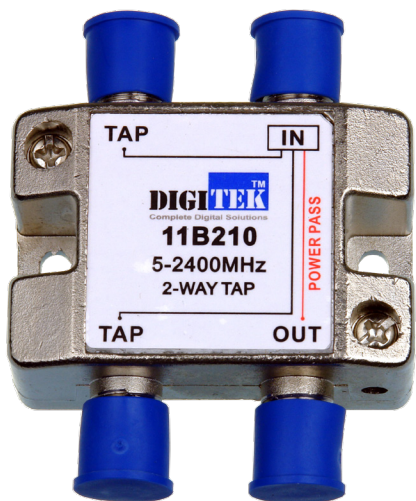


(11B210)

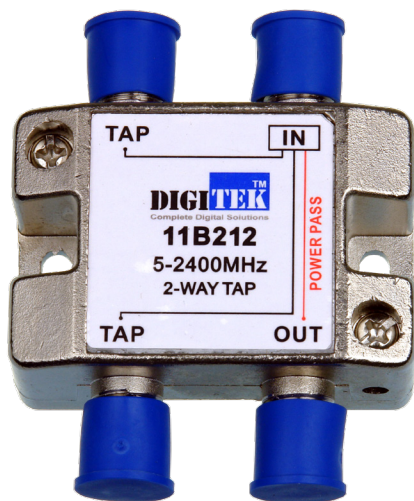


(11B212)

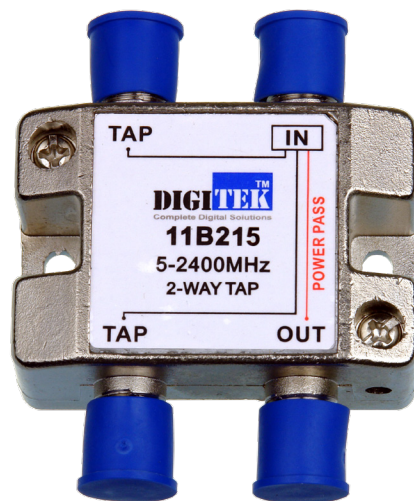


(11B215)

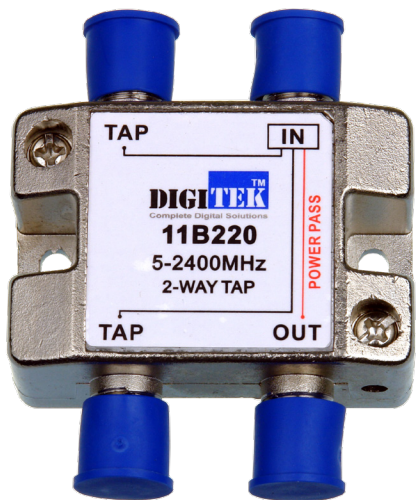

(11B220)

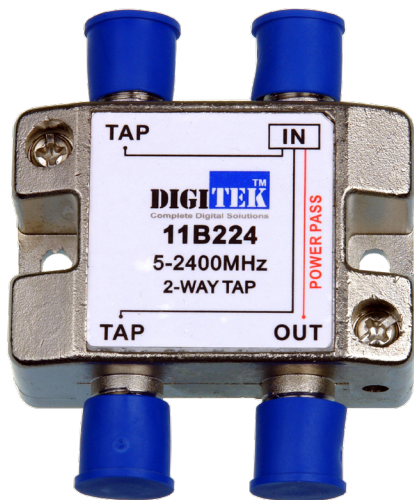

(11B224)

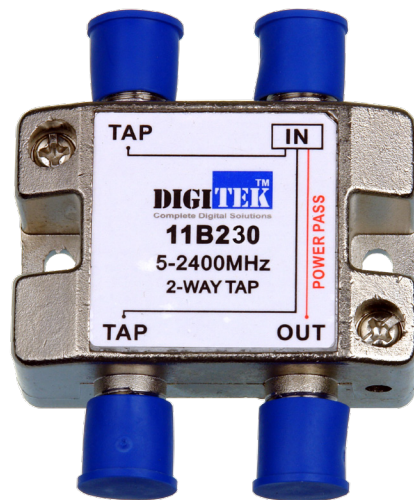

(11B230)

DIGITEK[®]

Complete Digital Solutions

2-Drop 5-2400MHz Coupler

11B210	10dB
11B212	12dB
11B215	15dB
11B220	20dB
11B224	24dB
11B230	30dB

FEATURES:

- Designed for use in large distributed MATV systems
- Used to tap off the exact signal level required for each outlet/cable run
- 2-Way configuration
- Six different signal variations
- Zinc diecast housing
- F-Type Female connectors for easy installation
- Includes power pass feature
- Power pass from input to output

SUB HEADER CATEGORY	Free-To-Air & Satellite
COUPLER POINTS	2-Drop
FREQUENCY RANGE	5-2400MHz
TAP LOSS	11B210: 10dB
	11B212: 12dB
	11B215: 15dB
	11B220: 20dB
	11B224: 24dB
	11B230: 30dB
CONNECTION TYPE	F-Type Female
PACKAGING	Single Piece
WHAT'S INCLUDED	• 1x 2-Drop Coupler
WARRANTY	1 Year

FOR MORE INFORMATION:

☎ 1300 601 915 ✉ orders@bitek.com.au 🌐 www.bitek.com.au

DISTRIBUTED BY: **BITEK PTY LTD**