

Digital Satellite Finder 18ASF-500


FEATURES:

- DVB Compatibility: Supports DVB-S2 and DVB-S standards for versatile satellite signal processing
- Multi-Standard Demodulation & Decoding: Handles a wide range of modulation formats for reliable performance across different satellite systems
- LCD Display: Clear, easy-to-read screen for real-time signal monitoring
- Built-in Backlight & Buzzer: LCD backlight for low-light visibility and integrated buzzer for audible signal feedback
- Control Signal Support: Compatible with 0/22 kHz tone and 13/18V polarization control signals
- Power Supply: Operates on DC 12V-20V for flexible power options in field use

Signal Input(from LNB)

Buzzer

Signal Output(to receiver)

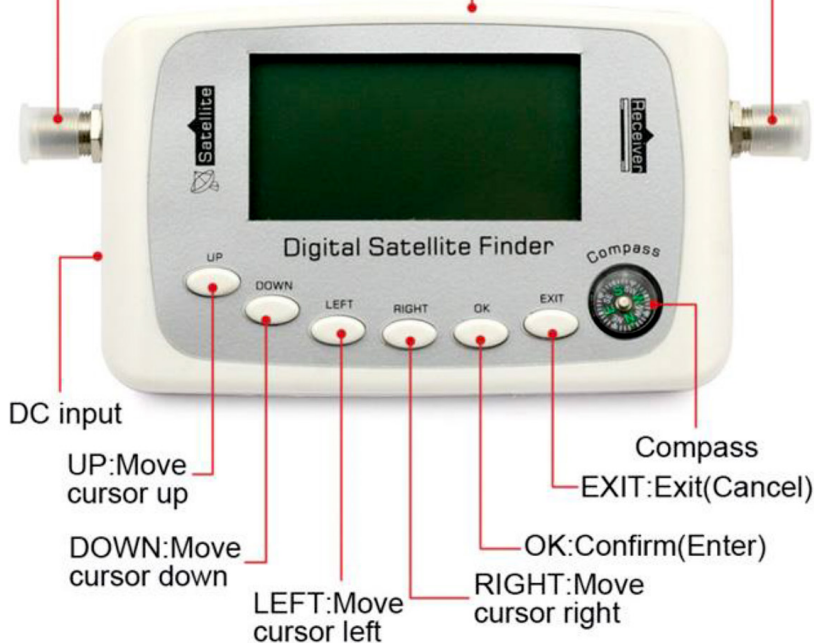

(Accessories)



(Packaging)

TOOL TYPE	Digital Satellite Finder
INPUT CONNECTORS	F-Type
INPUT FREQUENCY	950MHz - 2150MHz
INPUT LEVEL RANGE	-65dBm to -25dBm
SYMBOL RATE	1 - 45Msps
DiSEqC VERSION	1.0 (Supported)
OPERATING VOLTAGE	DC 12V-20V
OPERATING TEMPERATURE	0°C to 40°C
IMPEDANCE	75Ω
PACKAGING	Display Box with Label
WHAT'S INCLUDED	• 1x Satellite Finder • 1x Power Supply • Accessories
WARRANTY	1 Year

FOR MORE INFORMATION:

☎ 1300 601 915

✉ orders@bitek.com.au

🌐 www.bitek.com.au

DISTRIBUTED BY: **BITEK PTE LTD**