




(Front View)



(Rear View)

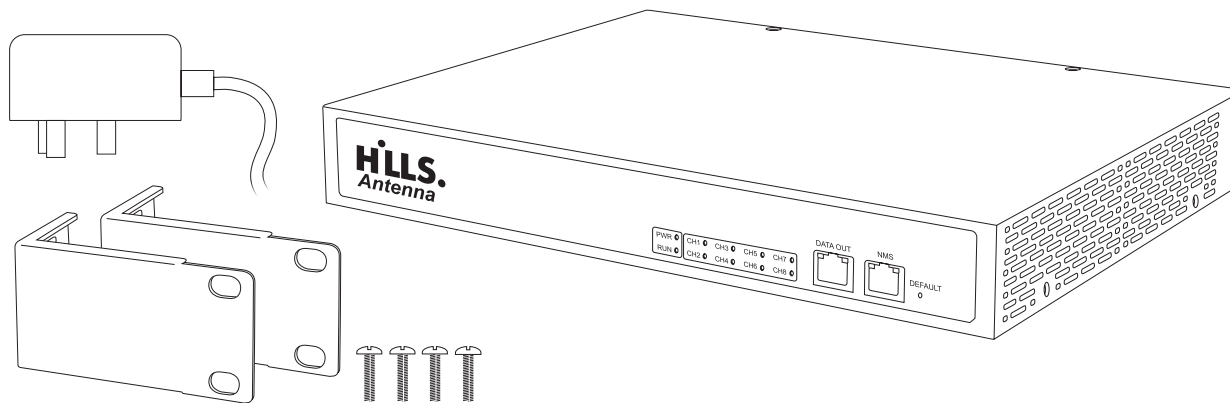

(Accessories)

HILLS. Antenna®

4 HDMI to 4Ch Modulator

17HD4CHMODMPEG2/4 MPEG-2+H.264
17HD4CHMODMPEG4 H.264

FEATURES:

- Video encoding in H.264 and audio encoding in MPEG and AAC
- Supports all major resolutions from 480i through to 1080p@60Hz
- Supports CA PID filtering, remapping and PSI/SI editing
- Offers 4x continuous output channels
- Easy configuration with built-in Web UI
- Includes RF TEST -20dB port
- Designed for 19" rack mounted equipment

SPECIFICATIONS

INPUT	INPUT CONNECTORS	4x HDMI + 1x RJ45
	TRANSPORT PROTOCOL	UDP, RTP
	INPUT IP ADDRESSES	256 (max.)
OUTPUT	INPUT TRANSPORT STREAM	MPTS & SPTS
	STANDARD	DVB-T
	BANDWIDTH	6, 7 or 8 M
	CONSTELLATION	QPSK, 16QAM, 64QAM
RF	GUARD INTERVAL	2K, 4K, 8K
	OUTPUT LEVEL	≥ 45dBmV
	FREQUENCY RANGE	50~999.999MHz
	OUT-BAND REJECTION	≥ 60dB
GENERAL	MER	Typ. 38dB
	POWER CONSUMPTION	< 57W
	DIMENSIONS	318(W) x 260(D) x 44(H) mm
	LANGUAGES	中文 / English
PACKAGING	Box with Label	
WHAT'S INCLUDED	<ul style="list-style-type: none"> • 1x Modulator • 2x Mounting Rack Ears • 4x Mounting Screws • 1x Power Cord with 3-Pin AU Plug • 1x 100-240V AC to 12V DC 7A Power Supply • 1x Manual 	
WARRANTY	1 Year	

FOR MORE INFORMATION:

☎ 1300 601 915 ✉ orders@bitek.com.au 🌐 www.bitek.com.au

DISTRIBUTED BY: **BITEK PTY LTD**