



(17HA1CHMOD)




(17HA1CHMOD4K)



(Accessories)




(LCM Screen - Menu & Parameter Settings)

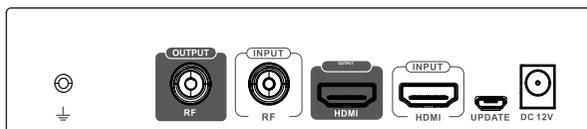


(Rear View - Ports)


1. Point to Point



2. Point to Multi-point

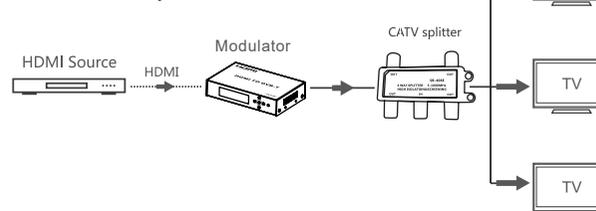

3. Multi-point to Multi-point

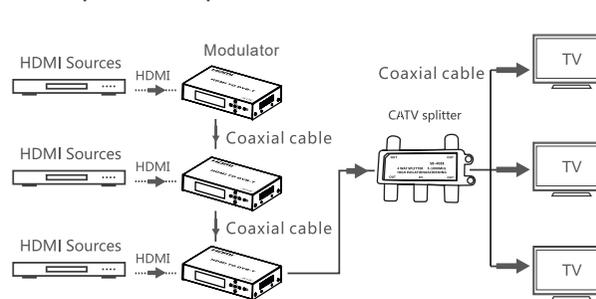

Connection Configurations



HDMI to DVB-T 1Ch Modulator

17HA1CHMOD

1080p

17HA1CHMOD4K

4K

FEATURES:

- Durable metal housing, easy to install & wall mountable
- Strong anti-noise & anti-interference ability
- Supports multiple modulator configurations
- Distribute one source to multiple displays with one modulator via a CATV Splitter
- Supports DVB-T digital high definition RF signal output
- Lightning protection, surge protection and ESD protection

SPECIFICATIONS	17HA1CHMOD	17HA1CHMOD4K
HDMI SIGNAL	HDMI 1.3 compatible HDCP 1.2	HDMI 2.0 compatible HDCP 1.4/HDCP 2.2
HDMI RESOLUTION	<ul style="list-style-type: none"> • 480i@60Hz • 480p@60Hz • 576i@50Hz • 576p@50Hz • 720p@50/60Hz • 1080i@50/60Hz • 1080p@24/25/-30/50/60Hz 	<ul style="list-style-type: none"> • 480p@60Hz • 576p@50Hz • 720p@50/60Hz • 1080i@50/60Hz • 1080p@24/25/-30/50/60Hz • 3840x2160@24/-25/30/50/60Hz
VIDEO ENCODING	H.624	H.624 / H.265 (4K)
AUDIO ENCODING	MPEG2	
COAXIAL STANDARD / CABLE	DVB-T / RG59, RG6, RG11	
FREQUENCY	177.5 to 866MHz	
EFFECTIVE BIT RATE	24M bits (max.)	
POWER	12V DC / 1A	
DIMENSIONS (MM)	158(W) x 115(D) x 33(H)	
OPERATING / STORAGE TEMP.	-20° ~ 60°C / -30° ~ 70°C	
PACKAGING	Box with Label	
WHAT'S INCLUDED	<ul style="list-style-type: none"> • 1x 17HA1CHMOD4K Modulator • 1x 12V DC / 1A Power Adaptor • Mounting Hardware: 2x Ears, 4x Screws • 1x User Manual 	
WARRANTY	1 Year	

FOR MORE INFORMATION:

☎ 1300 601 915 ✉ orders@bitek.com.au 🌐 www.bitek.com.au

DISTRIBUTED BY: **BITEK PCU LTD**