

# HDMI to Composite/S-Video Converter

## User Manual

Thanks for taking our product, please read this manual carefully before application.


### Introduction:

This converter box is designed to convert HDMI to either Composite Video or S-Video. It allows the devices only equipped HDMI output to be connected to analog TV. It is mostly applied in AV equipment testing.

### Features:

- Input HDMI Resolution: 480p(60Hz), 576p(50Hz), 720p(50Hz/60Hz), 1080i(50Hz/60Hz), 1080p(50Hz/60Hz);
- Output signal: Composite Video(1.0Vpp), S-Video(Y:1.0Vpp, C:0.3Vpp);
- Output Video Systems: PAL/NTSC;
- Output Video Impedance: 75Ω;
- Compatible with HDMI;
- Power Supply: DC 5V;
- Working Temperature: -25° C ~ 75° C;
- Working Humidity: 10%-60%;
- Product Dimension: 110x88x25mm(LxWxH).

### Interface Specification:

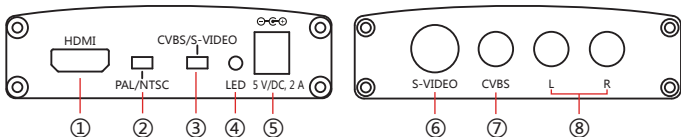

- ①. HDMI In: To connect HDMI device sources
- ②. PAL/NTSC Switch: select PAL or NTSC
- ③. CVBS/S-Video Switch: Select Composite Video or S-video as output
- ④. LED: Power indicator
- ⑤. DC 5V: To connect DC 5V power supply
- ⑥. S-Video Out: S-Video output
- ⑦. CVBS Out: Composite Video output
- ⑧. L/R: Audio L/R output

## Accessories:

Item	Qty(pcs)	Remark
Power Supply	1	DC 5V
AV Cable	1	1.5 meters
S-Video Cable	1	1.5 meters
User Manual	1	

## Connection Image:



Note: This product doesn't support simultaneous output of Composite Video and S-Video. Please select either one of them by switch button on the unit.